
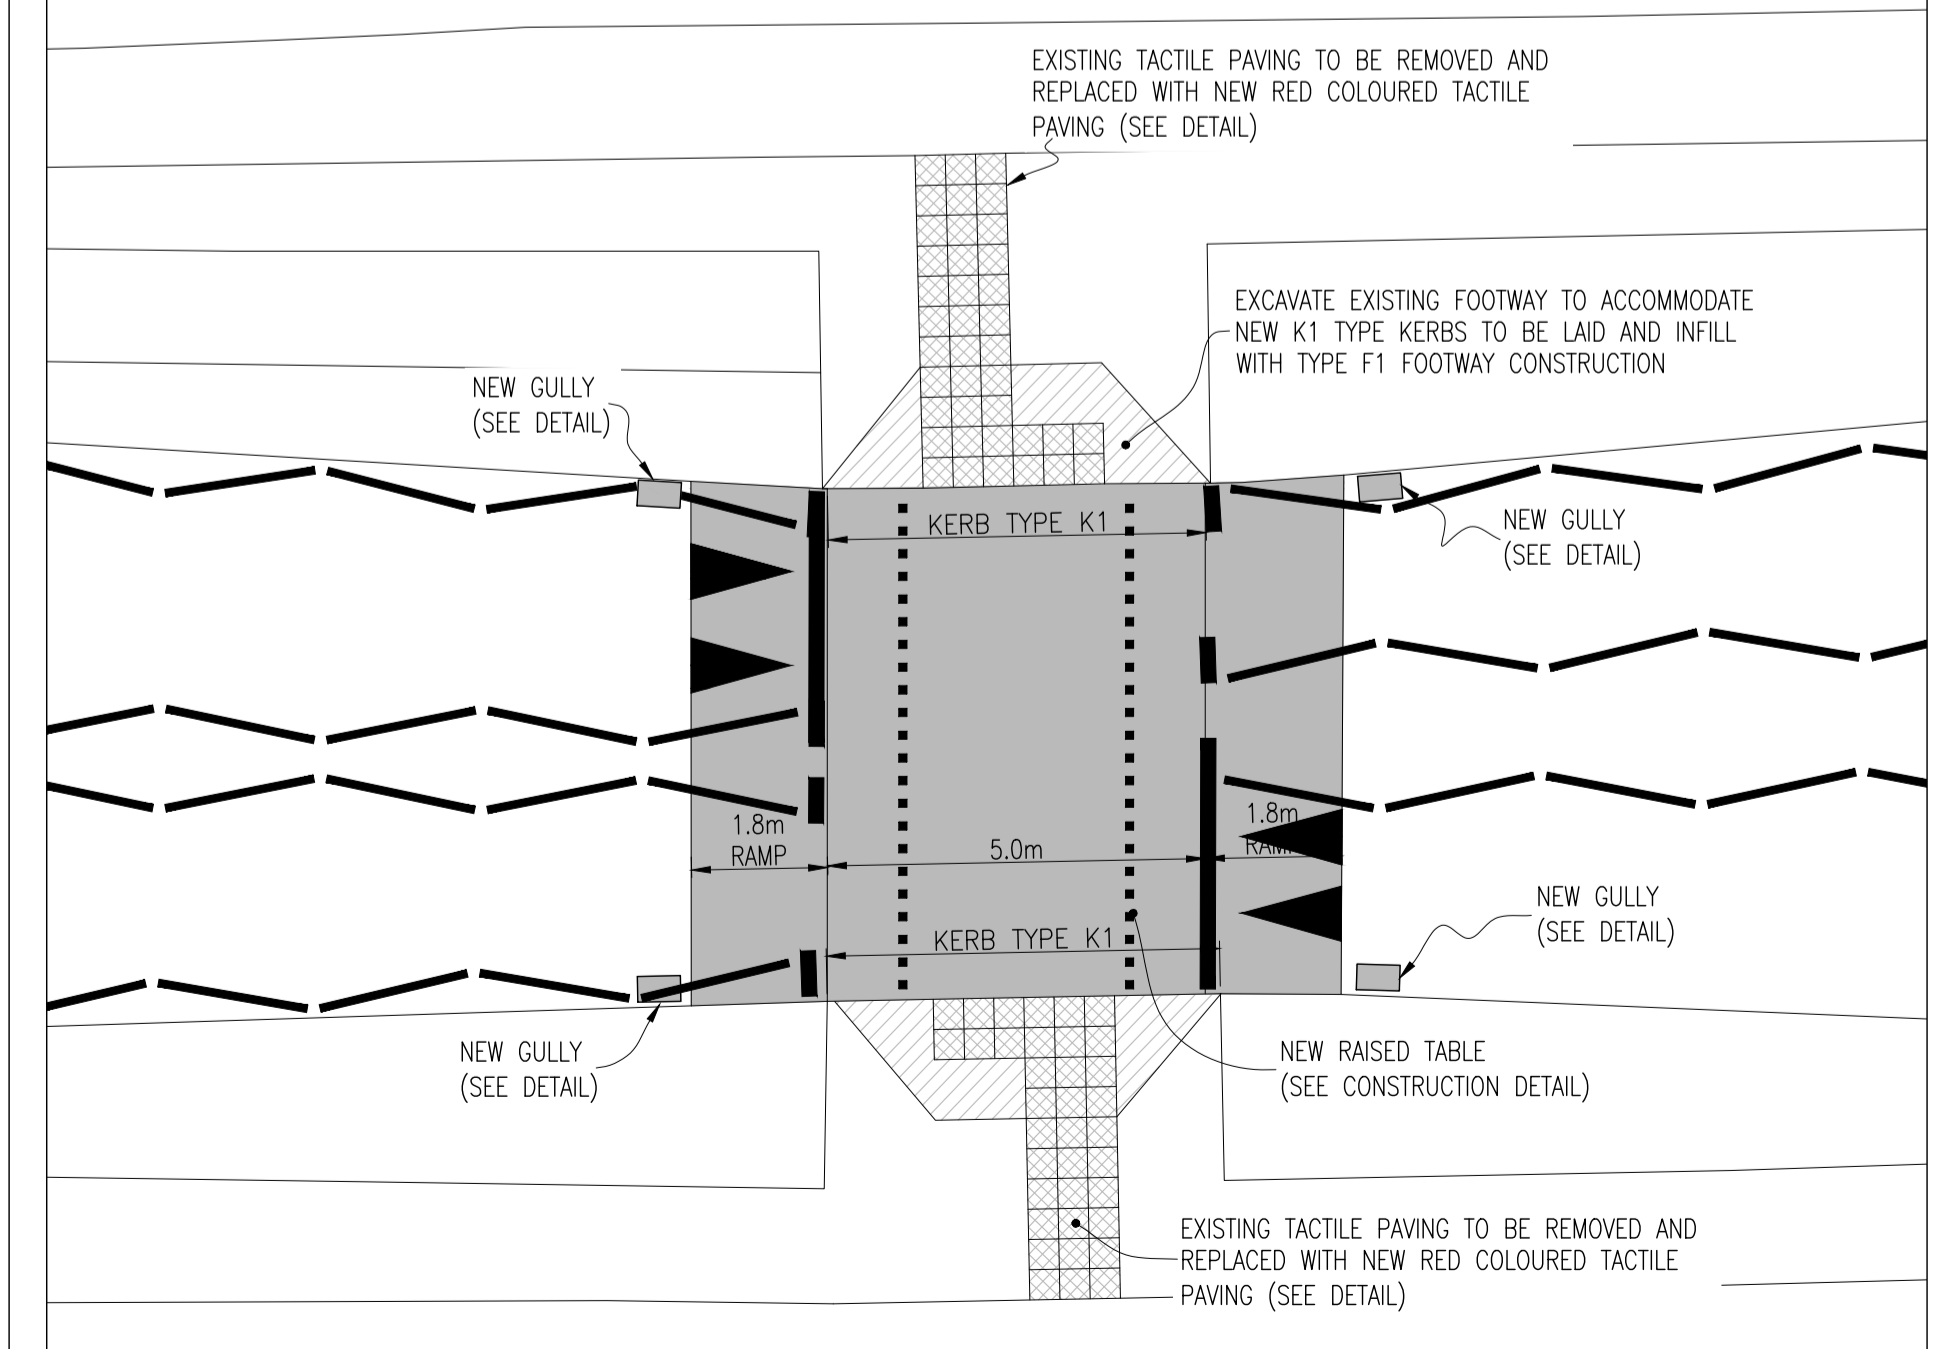


All rights reserved. No part of this document may be reproduced in any material form (including photocopying or storing in any medium) without the written permission of Northumberland County Council except in accordance with the provisions of Copyright, Designs and Patents Act 1988. Unauthorised reproduction may lead to prosecution or civil proceedings.

NOTES:

- TRAFFIC SIGNS**
 - NEW TRAFFIC SIGNS TO COMPLY WITH BS EN 12899-1:2007, AND NATIONAL ANNEX, BE MANUFACTURED FROM ALUMINIUM COMPOSITE PANEL WITH CLASS B2 SIGN FACE SHEETING UNLESS STATED OTHERWISE IN THE TRAFFIC SIGN SCHEDULE.
 - DESIGN WIND-LOADING TO DETERMINE SIGN SUPPORT AND FOUNDATION DESIGN TO BS EN 12899-1:2007, AND NATIONAL ANNEX, HAS BEEN ASSESSED USING BUCHANAN "SIGNLOAD" SOFTWARE OR SIMILAR APPROVED SOFTWARE.
 - ALL MECHANICAL FASTENERS FOR NEW SIGNS TO BE PROVIDED ONLY FROM APPROVED SOURCES.
 - ENSURE SIGNS DO NOT PROTRUDE ABOVE SIGN EDGE.
 - ENSURE A MINIMUM OF 0.5m CLEARANCE FROM EDGE OF CARRIAGEWAY AND 1.2m ON HIGH SPEED DUAL CARRIAGEWAY.
 - EXACT LOCATION OF SIGNS TO BE AGREED WITH DESIGNER ON SITE PRIOR TO COMMENCEMENT OF WORKS.
- ROAD MARKINGS**
 - NEW MARKINGS TO BE IN WHITE THERMOPLASTIC SCREED WITH APPLIED GLASS BEADS.
 - ROAD MARKINGS SHOULD BE IN ACCORDANCE WITH CLAUSE 1212 OF SHW, RETRO-REFLECTIVITY REQUIREMENTS FROM THE DATE OF APPLICATION OR DATE OF TRAFFICING, WHICHEVER IS LATER, AND SHALL LAST FOR THE FUNCTIONAL LIFE OF THE MARKING.
 - MARKINGS TO HAVE A REQUIREMENT OF A MINIMUM RETRO-REFLECTIVITY VALUE OF 200 MCD/M²/LX.
 - THE MINIMUM LAID THICKNESS IS 2.0mm FOR SCREEDED MARKINGS AND 1.5mm FOR SPRAY APPLIED MARKINGS. IN NO CASE SHALL ANY MATERIAL BE LAID MORE THAN 6mm THICK.
 - ALL HATCHED ROAD MARKINGS AND TRAFFIC ISLANDS TO BE SWEEP CLEAN OF DETRITUS MATERIAL PRIOR TO LAYING OF ANY ROAD MARKINGS.
 - BETWEEN POINT x AND y REMOVE ALL EXISTING CARRIAGEWAY CENTRE LINE, ARROW, HATCHED AND "SLOW" ROAD MARKINGS TO ALLOW NEW ROAD MARKING LAYOUT TO BE LAID.
- GENERAL**
 - THIS DRAWING TO BE READ IN CONJUNCTION WITH: HFD19545/06/A196/01/02 AND 03.
 - ALL WORKS TO BE AGREED ON SITE PRIOR TO COMMENCEMENT.
 - ANY QUERIES PLEASE CONTACT JOHN MATHER, COUNTY HALL, TEL. No. 01670 624131.

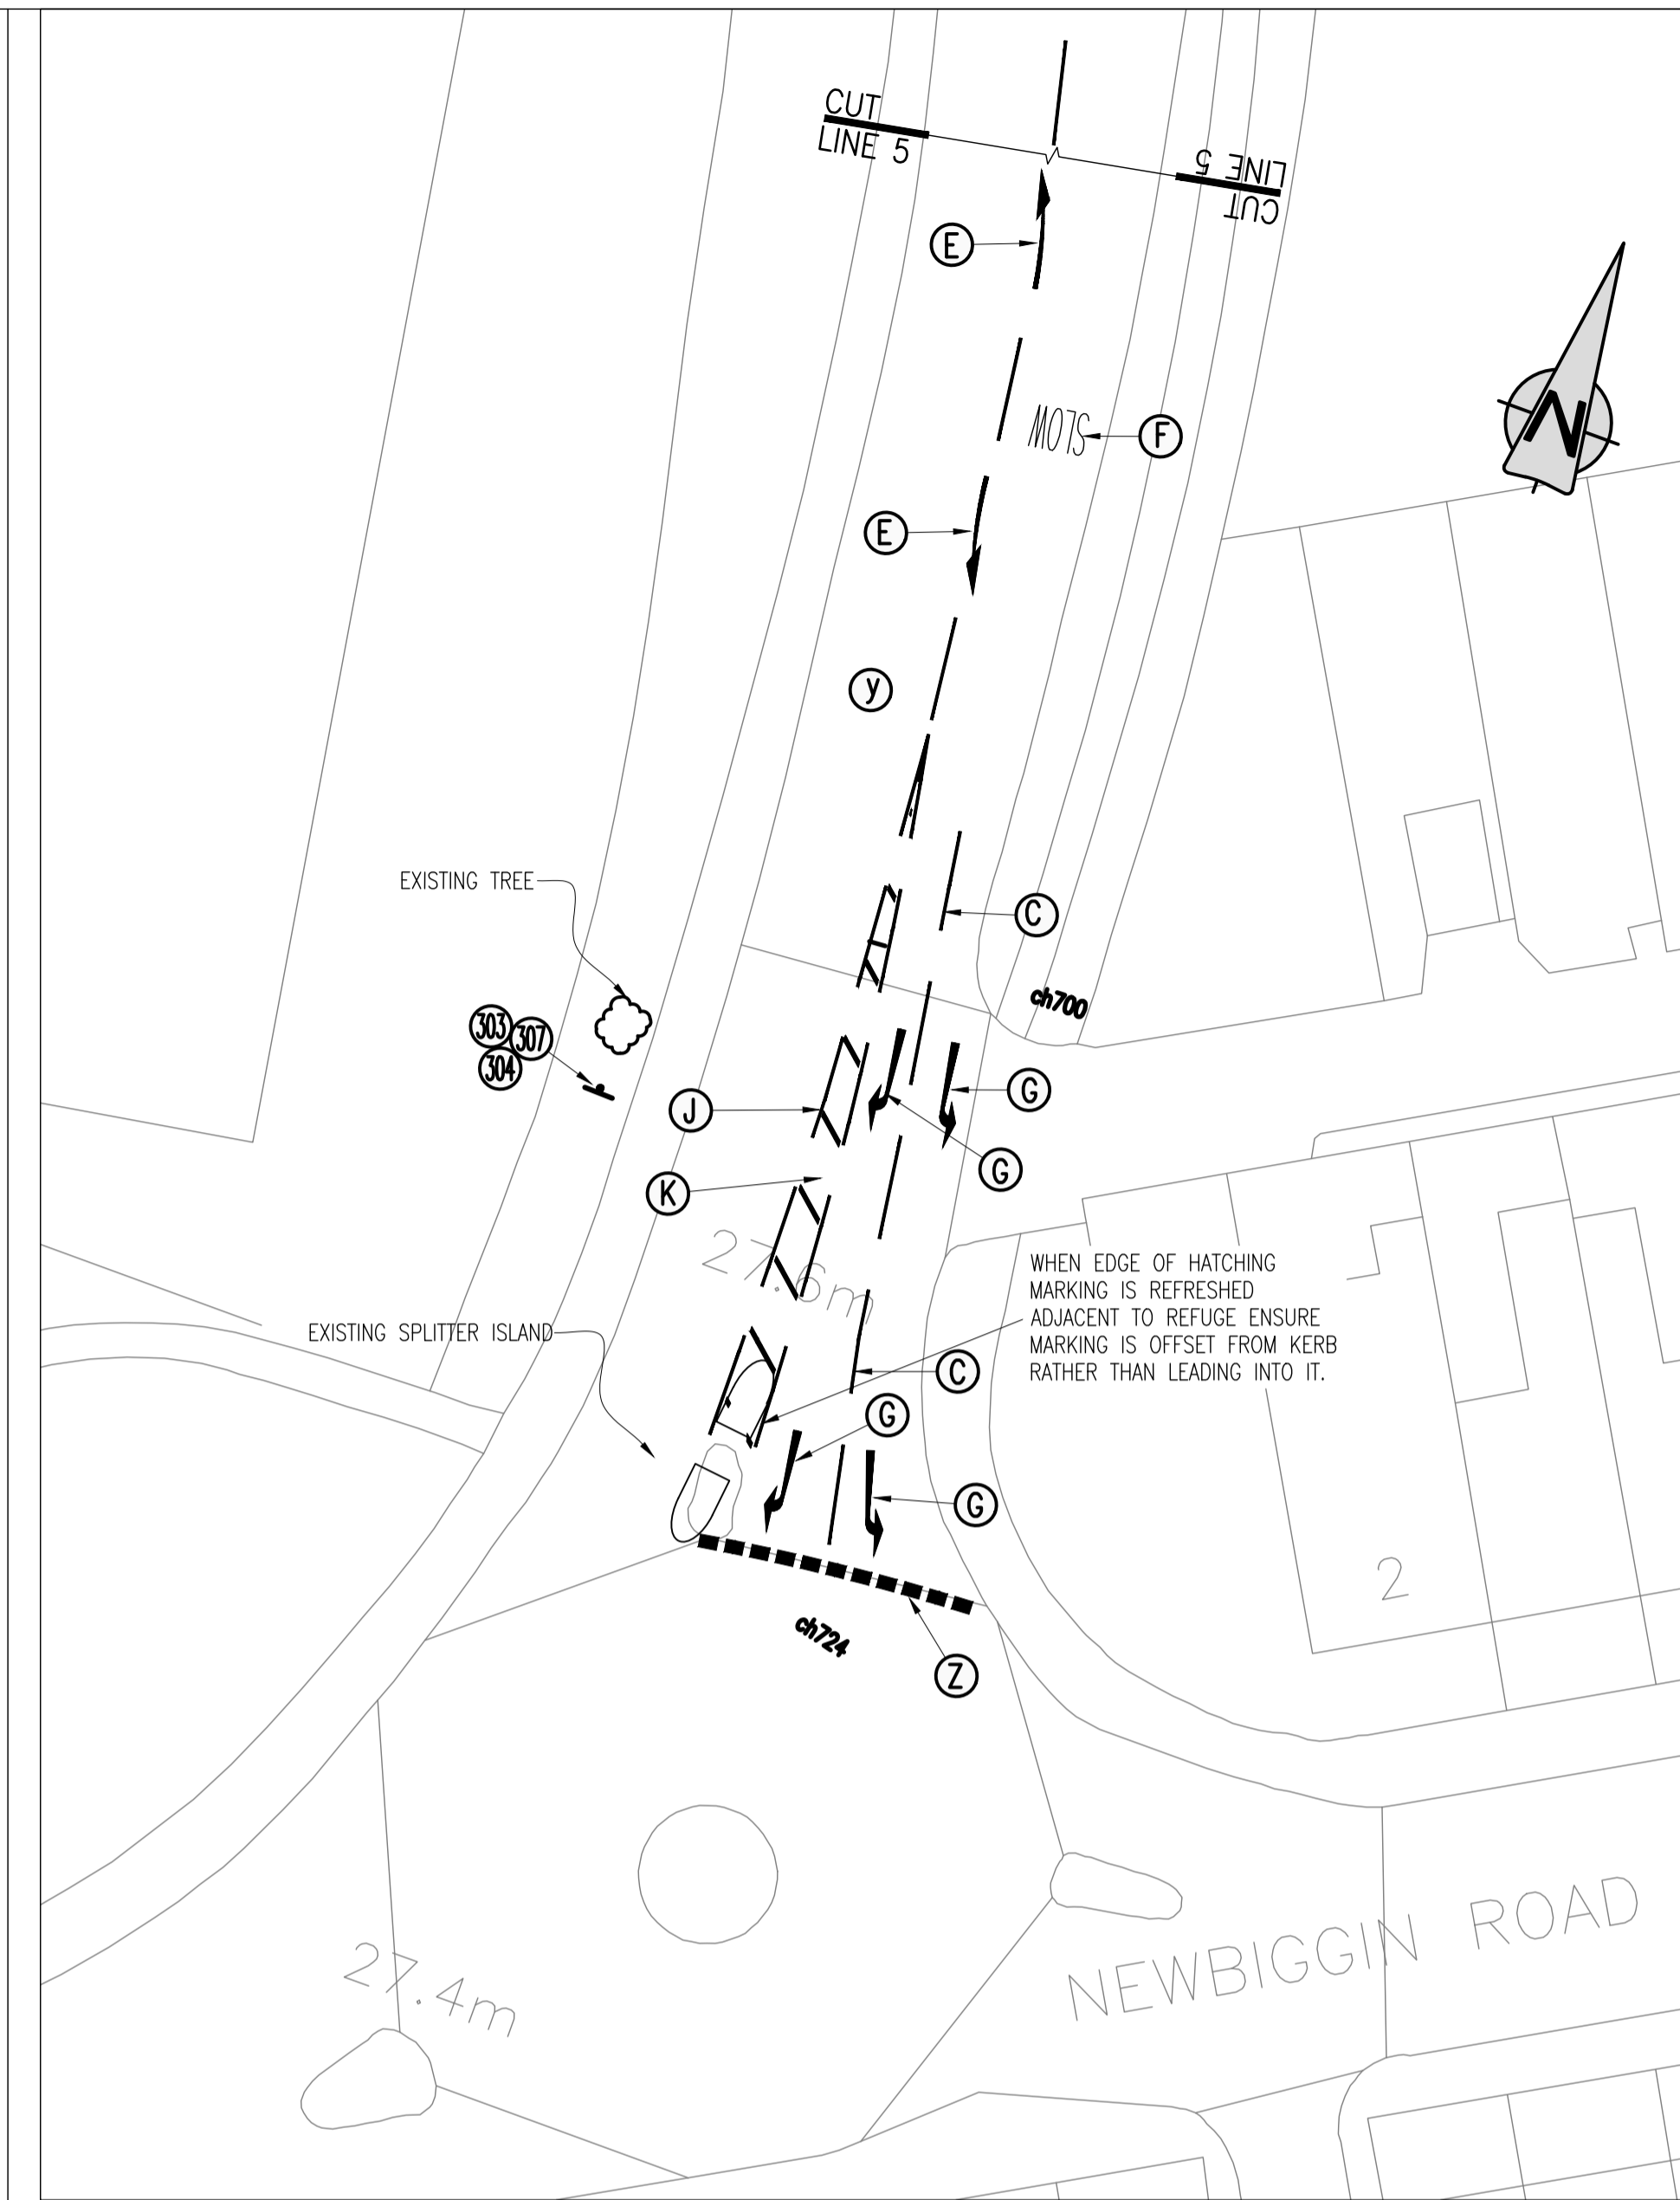

Revision:	By:	Chk.:	App.:	Date:	Rev.:

Reproduced from based upon the Ordnance Survey mapping with permission of the Controller of the Majesty's Stationery Office. © Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. NORTHUMBERLAND COUNTY COUNCIL - O.S. License No. 100049048 (2005)

CONSTRUCTION

Client:
NORTHUMBERLAND COUNTY COUNCIL
COUNTY HALL, MORPETH
NORTHUMBERLAND, NE61 2EF

Job Title:
**A196 NORTH SEATON ROAD
ASHINGTON**

Drawing Title:
**ROAD MARKING
AMENDMENTS AND SPEED REDUCING
FEATURES (Sheet 2 of 3)**

Scale(s):
1:250 & AS SHOWN

Northumberland County Council
Technical Services

Drawn:	SY	Date:	SEP'20	Checked:	KB	Passed:	GM
Drawing Number:	HFD19545/06/A196/01/02						
Oracle Number:	HFD19545						

